


FILTERCARTRIDGES

FC 40xx – FA


- wound polypropylen filtercartridge
- made from FDA approved polypropylen without additions or binders
- with internal core made from polypropylen

for the filtration

- in watertreatment
- in the food and beverage industry
- in the biotechnology
- in elektronik and nuklear industry
- for petrochemical industrie
- in the galvanic industry
- for fine chemicals

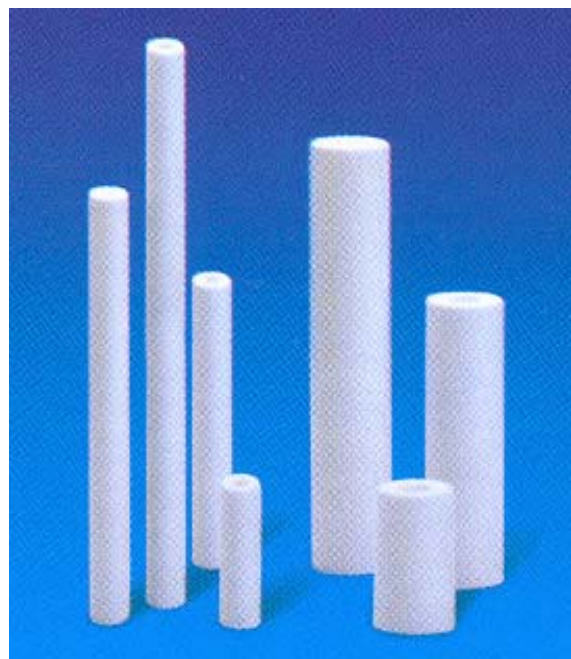

Length	9 3/4"	20"	30"
	(248	508	762 mm)
Filterfiness	1, 5, 10, 20, 50 micron		
Filtrationefficiency	80%		
max. Pressure	6 bar		
max. Temperatur	80°C		
Outsidediameter	4" / 120mm		
Insidediameter	28 mm		
Initial-Differentialpressure	0,15 bar		
max. Differentialpressure	0,8 bar		

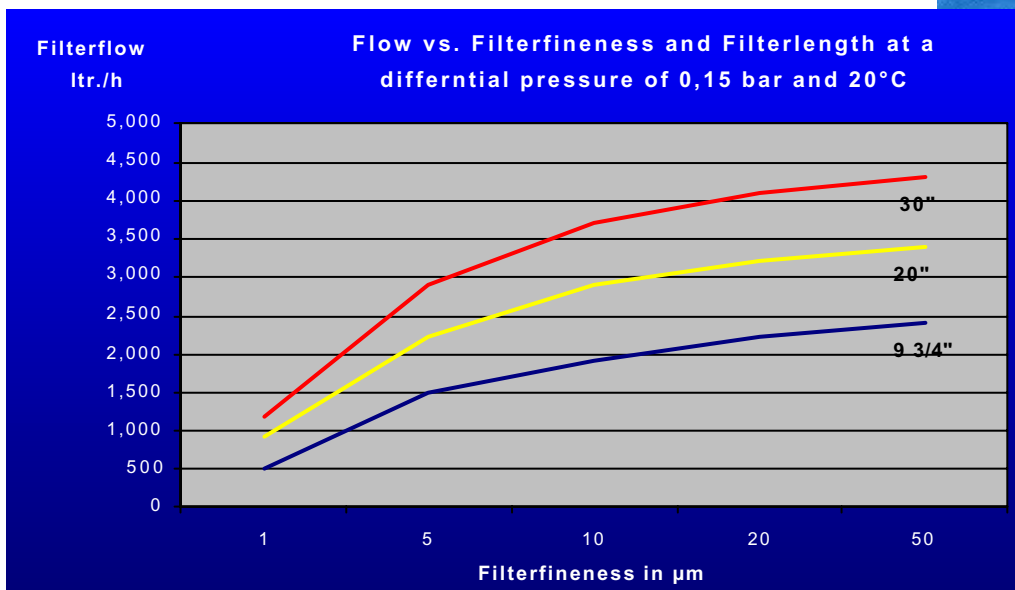

Technical changes possible. Data given not to understand as warrantyfigures