


FILTERCARTRIDGE

CORELESS FC 60xx CL



- high performance filtercartridge with excellent rejections
- best for pretreatment in membranesystems
- high reduction of SDI

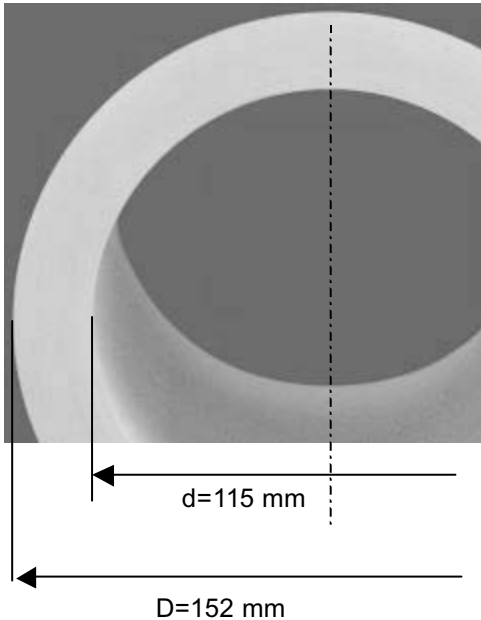

FILTERCARTRIDGE Type FC 6020 CL

Type	Filterfineness	Flow*	Art.No.
FC 6020 CL - 1	10 - 1 μ m	6 m ³ /h	490 340
FC 6020 CL - 5	20 - 5 μ m	12 m ³ /h	490 341
FC 6020 CL - 20	50 - 20 μ m	18 m ³ /h	490 342

*at initial differential pressure of 0,15 bar



Diameter	outside	6" (152 mm)
	inside	4,5" (115 mm)
Length		20" (508 mm)
nominal Rejection		95%
max. Temperatur		80 °C

FILTERCARTRIDGE Type FC 6040 CL

Type	Filterfineness	Flow*	Art.No.
FC 6040 CL -1	10 - 1 μ m	12 m ³ /h	490 343
FC 6040 CL -5	20 - 5 μ m	24 m ³ /h	490 344
FC 6040 CL -20	50 - 20 μ m	36 m ³ /h	490 345

*at initial differential pressure of 0,15 bar

Diameter	outside	6" (140 mm)
	inside	4,5" (105 mm)
Length		40" (1016 mm)
nominal Rejection		95%
max. Temperatur		80 °C

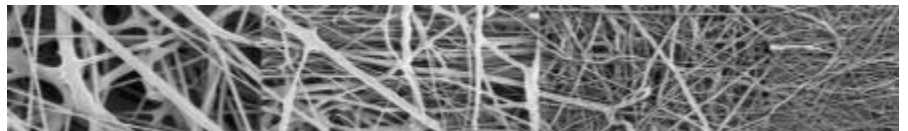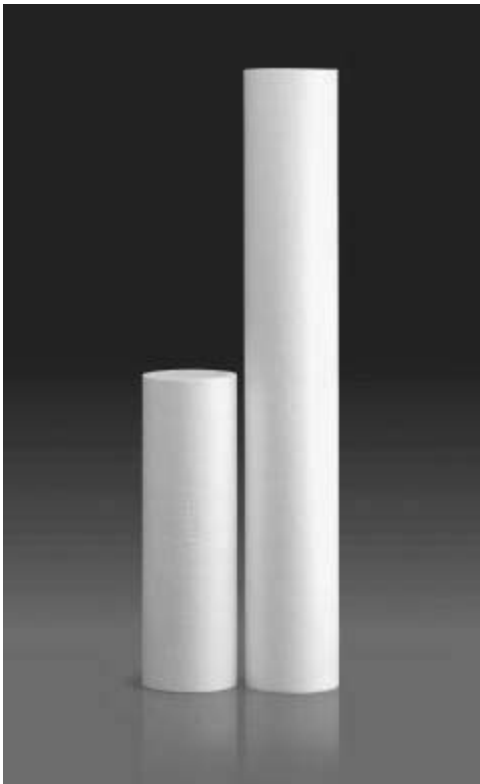

Distribution by:
INAQUA Vertriebsgesellschaft mbH
 Langmaar 7
 D-41238 Mönchengladbach
 Tel ++49 (0) 2166 621 99 0
 Fax ++49 (0) 2166 621 99 26

INAQUA
 Vertriebsgesellschaft mbH