


FILTERCARTRIDGES

FC 25xx / 40xx – PES

- pleated polyester- filtercartridge
- with internal core made from polypropylene
- with filterfiness of 5 µm

for the filtration
- in watertreatment

Material	Polyester		
Length	9 3/4" (248 mm)	20" 508 mm	30" 762 mm
Adapter	DOE		
Filterfiness	5 micron		
Filtrationefficiency	95%		
max. Pressure	6 bar		
max. Temperatur	80 °C		
Outsidediameter	25 xx	2,5" / 63mm	
	40xx	4" / 120 mm	
Insidediameter	28 mm		
Initial-Differentialpressure	0,15 bar		
max. Differentialpressure	0,8 bar		

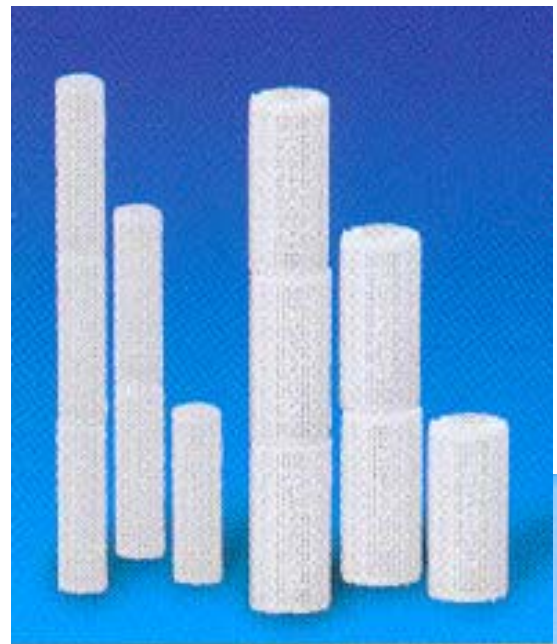

Type	Flow*	
	Ltr/ h	max. Ltr./h
FC 2509 PES 5	800	2500
FC 2520 PES 5	1600	4000
FC 2530 PES 5	2400	5000
FC 2540 PES 5	3200	5000
FC 4009 PES 5	1200	2500
FC 4020 PES 5	2400	5000
FC 4030 PES 5	3600	5000

* at 0,15 bar differential pressure and 20 °C