

FILTERCARTRIDGES

FC 25xx – SS-S

- stainless steel web filtercartridge
- made from AISI 316 (1.4571)
- with internal core, end cap from stainless steel
- washable / backwash possible


for the filtration

- in watertreatment
- in the food and beverage industry
- in the biotechnology
- in elektronik and nuklear industry
- for petrochemical industrie
- in the galvanic industry
- for fine chemicals



Length	9 3/4	20"	30"	40"
	(248	508	762	1016 mm)
Filterfiness	5, 10, 25, 40, 80, 100, 200 micron			
Filtrationefficiency	75%			
max. Pressure	6 bar			
max. Temperatur	80 – 360 °C			
Outsidediameter	2,5" / 63mm			
Insidediameter	28 mm			

Initial-Differentialpressure 0,15 bar
max. Differentialpressure 0,8 bar

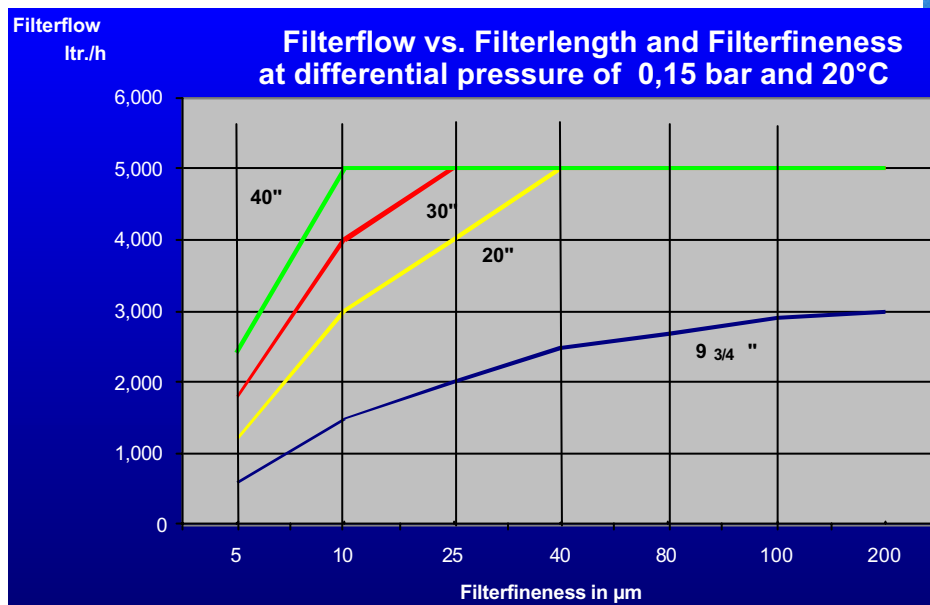

Technical changes possible. Data given not to understand as warrantyfigures